


MONUMENT ADJUSTMENT DETAIL

N.T.S.


- NOTES:

1. THE HIGHEST POINT ON THE CASING, RING, OR COVER SHALL BE NO LESS THAN FLUSH AND NO MORE THAN $\frac{1}{8}$ " BELOW FINISHED GRADE.
2. USE PRE-CAST CONCRETE ADJUSTING RINGS TO RAISE THE FRAMES ON MANHOLES AND CATCH BASINS.
3. ADJUSTING RINGS SHALL BE GROUTED INSIDE AND OUT USING 6000 P.S.I. GROUT.
4. ASPHALT PATCH TO BE LEVEL WITH EXISTING ASPHALT SURFACE.

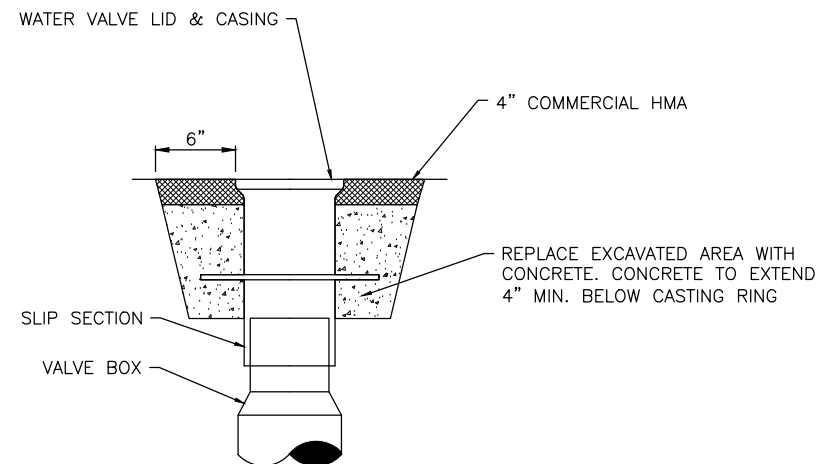

WATER VALVE ADJUSTMENT DETAIL

N.T.S.

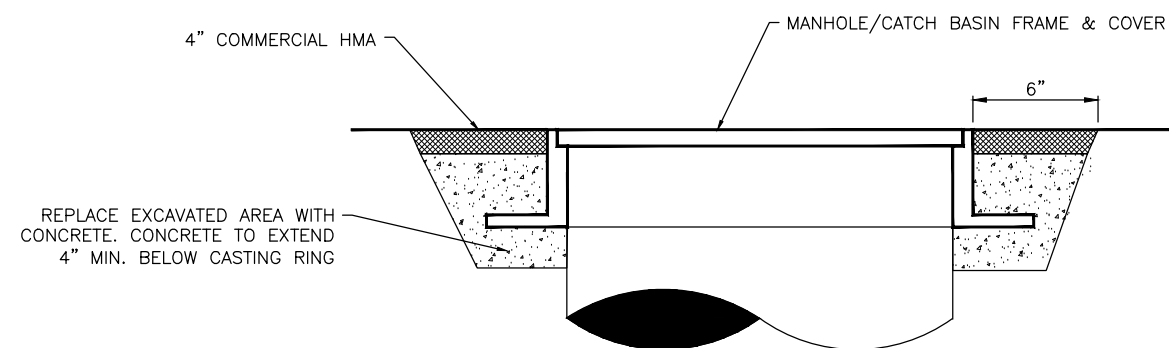

MANHOLE, CATCH BASIN ADJUSTMENT DETAIL

N.T.S.

STANDARD DETAIL

UTILITY ADJUST



SCALE: AS SHOWN	DRAWN		02/06	DATE DRAWN	REVISIONS		
	DESIGNED		CHECKED	08/20	DATE	INITIAL	
APPROVED BY			SK	01/01/2022	CAW		
			DATE APPROVED		AJS		
STANDARD SPECIFICATIONS							

DETAIL NO.

R-330

PAGE

1 OF 1